

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

A PORTION OF THE SUBDIVISIONAL LINES

AND

THE SUBDIVISION OF SECTIONS 12, 13, 14, AND 15

IN

**TOWNSHIP 36 SOUTH, RANGE 6 WEST,**

OF THE SALT LAKE MERIDIAN  
IN THE STATE OF UTAH

EXECUTED BY

***Jeremy D. Davis***  
***Cadastral Surveyor***

Under Special Instructions dated and approved ***June 17, 2014***, which provided for the surveys included under Group Number ***1259***, and assignment instructions dated ***June 17, 2014***.

Survey Commenced, ***June 24, 2014***  
Survey Completed, ***September 24, 2014***

# INDEX DIAGRAM

TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

6	5	4	3	2	9 1
					8
7	8	9	10	11	7 12
			14	12	5
18	17	16	14 15	11 14	4 13
			13	9	3
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

The Subdivision of Section 12.....	15
The Subdivision of Section 13.....	18
The Subdivision of Section 14.....	21
The Subdivision of Section 15.....	25

## TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

The following field notes are those of the dependent resurvey of a portion of the subdivisional lines, and the subdivision of sections 12, 13, 14, and 15, in T. 36 S., R. 6 W., Salt Lake Meridian, Utah.

## HISTORY OF SURVEYS

Surveyed by		Retr. or Resurveyed by	
<b>SOUTH BOUNDARY</b>			
All	A.J. Stewart Jr.	1883	
All		A.B. Lewis	1897
All		J.L. Thomas	1970
<b>EAST BOUNDARY (Panguitch Guide Meridian)</b>			
All	T.C. Bailey & J.G. Burrill	1874	
All		A.J. Stewart Jr.	1883
All		A.B. Lewis	1897
Portion		H.D. Badger	1972
Portion		J.D. Davis (concurrent)	2014
<b>WEST BOUNDARY</b>			
All	S.M. Richardson	1884	
All		A.B. Lewis	1897
Portion		L.V. Judd	2001
<b>NORTH BOUNDARY (Seventh Standard Parallel South)</b>			
All	T.C. Bailey & J.G. Burrill	1874	
All		A.J. Stewart Jr.	1883
Remon.		A. Nelson	1962-63
<b>SUBDIVISION</b>			
All	A.B. Lewis	1897	
Remon.		F.D. Reynolds	1975
<b>PRIVATE SURVEY</b>			

A survey was executed by Ken Hamblin, L.S. 166295, Ken Hamblin Land Surveying Inc., with a plat dated 06/12/1999, file No. 381, is on file at the Garfield County Recorder's office.

## TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 2009, and the Special Instructions for Group No. 1259, dated June 17, 2014.

The direction of each line is with reference to the true meridian, determined by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the *Standards for the Positional Accuracy of Cadastral Surveys when using Global Navigation Satellite Systems (GNSS)*, dated February 23, 2009. Trimble model R8 GPS receivers were used for field collection. Cadastral Measure Management (CMM) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and a search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from GPS static observations, post processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS): SGU1 ST GEORGE PUTIL CORS ARP, ECHO ECHO\_BRGN NV 1999 CORS ARP, P009 MARYSVALE\_UT2006 CORS ARP.

The geographic position of the corner of sections 13 and 24 only, on the east boundary of the township, as determined by direct RTK methods from the geodetic control, is as follows:

Latitude: **37°40'25.223" N.**,  
Longitude: **112°28'03.938" W.**, N.A.D. 83 (2011), EPOCH: 2010.00  
Network Accuracy = 0.200 meter at 95% confidence

The geographic position of the corner of sections 9, 10, 15, and 16, as determined by direct RTK methods from the geodetic control, is as follows:

Latitude: **37°41'17.080" N.**,  
Longitude: **112°31'22.550" W.**, N.A.D. 83 (2011), EPOCH: 2010.00  
Network Accuracy = 0.200 meter at 95% confidence

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

---

Dependent Resurvey of a Portion of the Subdivisional Lines  
Township 36 South, Range 6 West, Salt Lake Meridian, Utah

---

Reestablishment of the Survey Executed by  
A.B. Lewis in 1897

---

From the corner of sections 13, 14, 23, and 24, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 6 inches above a mound of stone, 3 ft. base, with brass cap marked as described in the official record of the 1968 re-monumentation record, with a steel fence post located 5 lks. to the north east, with a forest service sign attached.

Corner falls on flat ground in thick undergrowth, piñon and juniper growth.

N. 89°59.5' E., between sections 13 and 24.

- 40.561 The 1/4 section corner of sections 13 and 24, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 3 inches above a mound of stone, 3 ft. base, with brass cap marked as described in the official record of the 1968 re-monumentation record, with a steel fence post located alongside, along with a mound of stone, 3 ft. base by 1 ft. high, 3 lks. north of iron post.

Corner falls on flat ground in sagebrush, bitterbrush, and scattered piñon and juniper growth.

---

N. 89°47.0' E., beginning new measurement.

- 40.389 The monumented closing corner of sections 13 and 24, monumented with a sandstone, 16x10x4 inches, firmly set, marked 3 notches on north and south edges.

Add the marks "AM" and bury the marked stone in place.

- 40.973 Point for the corner of sections 13 and 24 only, at intersection with the west boundary of section 18, Township 36 South, Range 5 West.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a small mound of stone, to top of aluminum cap marked

	T36S	
R	S13	R
6	—	5
W	S24	W
	2014	

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Deposit a magnet at the base of the aluminum post.

Corner falls on gentle rolling land in piñon, juniper, and thick sagebrush.

From the corner of sections 13, 14, 23, and 24.

N. 0°30.6' E., between sections 13 and 14.

**19.736** Point for the S 1/16 section corner of sections 13 and 14, not monumented.

**39.472** The 1/4 section corner of sections 13 and 14, monumented with a quartzite stone, 12x8x4 inches, firmly set, dimly marked 1/4 on west face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, in a mound of stone, 3 ft. base, to top of aluminum cap marked

T36SR6W  
1/4  
S14 | S13  
2014

Deposit the marked stone alongside and buried a magnet at the base of the aluminum post.

Corner falls on a steep slope in red cedar and ponderosa pine.

From this point, a rebar, 5/8 inch diameter, firmly set, projecting 3 inches above the ground, with no cap attached, bears N. 83°14.5' E., 0.514 chains distance. Corner falls at corner of fences extending north and east, and was not utilized in the course of this survey.

N. 0°22.4' E., beginning new measurement.

**20.102** Point for the N 1/16 section corner of sections 13 and 14.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, in a small mound of stone, to top of aluminum cap marked

T36SR6W  
N 1/16  
S14 | S13  
2014

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Corner falls on a slight south slope in sagebrush, silver sage, bitter brush, and scattered red cedar.

From this point, a rebar, 5/8 inch diameter, firmly set, projecting 1 inch above the ground, with yellow cap attached bears S. 66°32.2' E., 0.711 links distance, with cap marked KEN HAMBLIN PLS 166295. Corner falls at corner of uncompleted fence extending south and east, and was not utilized in the course of this survey.

- 40.204 The corner of sections 11, 12, 13, and 14, monumented with a trachyte stone, 12x8x6 inches, (Record: 12x15x8 inches), firmly set, marked 4 notches on south and 1 notch on east edges.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T36SR6W	
S11	S12
S14	S13
2014	

Deposit the marked stone alongside, buried a magnet at the base, and raise a mound of stone, 3 ft. base by 2 ft. high, west of the aluminum post.

Corner falls 23 lks. north of wash drains southeast, on flat ground in piñon, red cedar, and scattered ponderosa pine.

S. 89°58.7' E., between sections 12 and 13.

- 20.179 Point for the W 1/16 section corner of sections 12 and 13.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, to solid rock, in a mound of stone, 3 ft. base, to top of aluminum cap marked

T36SR6W	
	S12
W 1/16	—
	S13
2014	

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner falls 71 lks. west of a fence line extending north and south, on gentle rolling land in thick sagebrush, bitter brush, and scattered red cedar.

- 40.358 Point for the 1/4 section corner of sections 12 and 13, at proportionate distance; there is no remaining evidence of the original corner. True point falls in a wash 60 ft. wide, 20 ft. deep.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Point selected for an off-line witness corner, bears  
S.  $41^{\circ}06.7'$  W., 0.730 chains distance.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22  
inches in the ground, in a mound of stone, 2 ft. base, to top of  
aluminum cap marked

WC  
T36SR6W  
S12  
1/4 ——— ↗  
S13  
2014

Set a steel fence post alongside and buried a magnet at the base  
of the aluminum post.

Corner falls 37 lks. south of south edge of wash, on flat ground  
in thick silver sage.

**60.537** Point for the E 1/16 section corner of sections 12 and 13.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24  
inches in the ground, in a small mound of stone, to top of  
aluminum cap marked

T36SR6W  
S12  
E 1/16 ———  
S13  
2014

Set a steel fence post alongside and buried a magnet at the base  
of the aluminum post.

Corner falls 44 lks. west of a fence line extending north and  
south, on gentle rolling land.

**80.716** The corner of sections 12 and 13 only, at intersection with the  
west boundary of section 7, monumented with a trachyte stone,  
12x8x6 inches, firmly set, marked 2 notches on north and 4  
notches on south edges and CC on west face.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24  
inches in the ground, with aluminum cap marked

T36S  
R S12 | R  
6 ——— | 5  
W S13 | W  
2014

Deposit the marked stone alongside, buried a magnet at the base,  
and raise a mound of stone 4 ft. by 3 ft. base by 2 ft. high,  
west of the aluminum post.



DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Corner falls on a steep northwest slope in thick bitterbrush,  
scattered piñon, and juniper.

From the corner of sections 11, 12, 13, and 14.

N. 0°44.8' W., between sections 11 and 12.

20.058 Point for the S 1/16 section corner of sections 11 and 12, not  
monumented.

40.116 The 1/4 section corner of sections 11 and 12, monumented with a  
trachyte stone, 12x8x4 inches, (Record, 14x14x12 inches), firmly  
set, in a mound of stone, 2 ft. base, marked 1/4 on west face, a  
steel fence post located alongside.

No remaining evidence of the original bearing trees was found.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20  
inches in the ground, in a mound of stone, 3 ft. base, to top of  
aluminum cap marked

T36SR6W  
1/4  
S11 | S12  
2014

Deposit the marked stone, set a steel fence post alongside, and  
buried a magnet at the base of the aluminum post.

Corner falls on a fence line extending southwest and northwest,  
on a slight northwest slope in ponderosa pine, red cedar,  
bitterbrush and sagebrush.

N. 0°04.5' E., beginning new measurement.

40.152 The corner of sections 1, 2, 11, and 12, monumented with a  
trachyte stone, (Record, sandstone), 14x10x4 inches, firmly set,  
marked 5 notches on south and 1 notch on east edges.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 15  
inches in the ground, in a mound of stone, 3 ft. base, to top of  
aluminum cap marked

T36SR6W  
S2 | S1  
S11 | S12  
2014

Deposit the marked stone alongside the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Corner falls 100 lks. west of a wash drains southeast, on a steep northeast slope in piñon and red cedar.

N. 89°51.8' E., between sections 1 and 12.

- 40.118 The 1/4 section corner of sections 1 and 12, monumented with a trachyte stone, (Record, sandstone), 12x8x6 inches, firmly set, marked 1/4 on north face, with an embedded mound of stone, 3 ft. by 2 ft. base, to the north.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 2 ft. base, to top of aluminum cap marked

T36SR6W  
S1  
1/4 —  
S12  
2014

Deposit the marked stone alongside and buried a magnet at the base of the aluminum post.

Corner falls in a slight depression, extending east and west, in sagebrush, bitterbrush, with scattered piñon and juniper.

N. 89°54.0' E., beginning new measurement.

- 40.066 The monumented closing corner of sections 1 and 12, monumented with a trachyte stone, 14x8x5 inches, firmly set, marked 1 notch on north and 5 notches on south edges with CC on west face, with a mound of stone 3 ft. base by 1 ft. high, to the west and a steel fence post alongside.

This corner will now function as an offline closing corner, add the marks "AM" and bury in place.

- 41.763 Point for the corner of sections 1 and 12 only, at intersection with the east township boundary.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 3 ft. base, to top of aluminum cap marked

T36S  
R S1 R  
6 — 5  
W S12 W  
2014

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner falls on a slight southeast slope in sagebrush, bitterbrush, with scattered piñon and juniper.

From this point, National Geodetic Station "PROCTOR", monumented with a standard USGS tablet stamped PROCTOR 1971, bears S.  $68^{\circ}51.1'$  E., forward bearing, N.  $68^{\circ}48.6'$  W., back bearing, 331.404 chains distance.

From the corner of sections 1, 2, 11, and 12.

N.  $0^{\circ}04.1'$  E., between sections 1 and 2.

- 40.046** The 1/4 section corner of sections 1 and 2, monumented with a trachyte stone, (Record, sandstone), 12x10x6 inches, firmly set, marked 1/4 on west face, with an embedded mound of stone, 3 ft. base by 1 ft. high located to the north.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with the aluminum cap marked

T36SR6W  
1/4  
S2 | S1  
2014

Deposit the marked stone alongside, and buried a magnet at the base of the aluminum post. Rehabilitate the mound of stone 3 ft. base by 2 ft. high, to the west.

Corner falls on top of finger ridge extending northeast and southwest, between two washes draining northeast and southeast, in thick bitterbrush, sagebrush, and scattered piñon and juniper.

From this corner, the closing corner of sections 1 and 2 only, on the north boundary of the township, monumented with a sandstone, 12x8x6 inches, firmly set, marked 1 notch on east and 5 notches on west edges, bears N.  $0^{\circ}04.4'$  W., 37.169 chains distance, with a mound of stone, 3 ft. base by 2 ft. high located to the south along with a steel fence post located alongside.

Corner falls on top of finger ridge extending east and west in sagebrush.

From the corner of sections 13, 14, 23, and 24.

N.  $89^{\circ}30.0'$  W., between sections 14 and 23.

- 19.736** Point for the E 1/16 section corner of sections 14 and 23, not monumented.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

**39.472** The 1/4 section corner of sections 14 and 23, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 6 inches above a mound of stone, 3 ft. base, with brass cap marked as described in the official record of the 1968 re-monumentation record, with a steel fence post located alongside.

No remains of the original bearing trees were found.

Corner falls on gentle rolling land in scattered piñon, juniper and ponderosa pine.

---

**S. 89°36.7' W.**, beginning new measurement.

**20.900** Point for the W 1/16 section corner of sections 14 and 23.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T36SR6W  
S14  
W 1/16 —  
S23  
2014

Deposit a magnet at the base of the aluminum post.

Corner falls in a fence line extending east and west, on a gradually steep north slope in conifer pine, red cedar and ponderosa pine.

From this point, a rebar, 5/8 inch diameter, firmly set, projecting 5 inches above the ground, with yellow cap attached bears S. 88°31.7' E., 0.407 chains distance, with cap marked KEN HAMBLIN PLS 166295, and was not utilized in the course of this survey.

**41.800** The corner of sections 14, 15, 22, and 23, monumented with a trachyte stone, (Record, sandstone), 12x14x4 inches, firmly set, marked 3 notches on south and 2 notches on east edges.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T36SR6W  
S15 | S14  
S22 | S23  
2014

Deposit the marked stone alongside and buried a magnet at the base of the aluminum post.

Corner falls 1.5 lks. north of a fence line extending east and west, on a steep north slope in tall ponderosa pine and conifer.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

From this point, a rebar, 5/8 inch diameter, firmly set, projecting 2 inches above the ground, with yellow cap attached bears, S. 87°12.4' E., 0.818 chains distance, with cap marked K HAMBLIN PLS 166295, and was not utilized in the course of this survey.

N. 0°11.5' E., between sections 14 and 15.

19.596 Point for the S 1/16 section corner of sections 14 and 15, not monumented.

39.192 The 1/4 section corner of sections 14 and 15, monumented with a sandstone, 14x8x4 inches, (Record, 18x8x8 inches), firmly set, marked 1/4 on west face, in a small mound of stone.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, to solid rock, in a mound of stone, 2 ft. base, to top of aluminum cap marked

T36SR6W  
1/4  
S15 | S14  
2014

Deposit the marked stone alongside the aluminum post.

Corner falls in a slight depression extending northwesterly, in low sagebrush.

From this point, a rebar, 5/8 inch diameter, firmly set, projecting 4 inches above the ground, with yellow cap attached, bears N. 42°32.2' E., 1.989 chains distance, with cap marked KEN HAMBLIN PLS 166295, at corner of fences extending north, south, and west, and was not utilized in the course of this survey.

N. 0°50.4' E., beginning new measurement.

20.114 Point for the N 1/16 section corner of section 14 and 15.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T36SR6W  
N 1/16  
S15 | S14  
2014

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner falls 133 lks. west of fence line extending north and south, on gentle rolling land, in sagebrush, silver sage, with scattered piñon and red cedar.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

From this point, a rebar, 5/8 inch diameter, firmly set, projecting 3 inches above the ground, with yellow cap attached, bears N.  $38^{\circ}46.3'$  E., 2.189 chains distance, with cap marked KEN HAMBLIN PLS 166295, at corner of fences extending south and east, and was not utilized in the course of this survey.

- 40.228** Point for the corner of sections 10, 11, 14, and 15, determined by record bearing and distance from the original bearing tree, falls in a wash drains southerly.

A ponderosa pine, 24 inches diameter, bears N.  $87^{\circ}$  E., 150 links distance, with faint scribe marks on a partially healed blaze.

Point selected for an off-line witness corner, bears N.  $86^{\circ}59.8'$  E., 0.720 chains distance.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

WC  
T36SR6W  
S10 | S11  
← S15 | S14  
2014

Deposit a magnet at the base of the aluminum post.

Corner falls 32 lks. west of a large wash, 30 ft. wide by 7 ft. deep, drains southerly in piñon, juniper, and scattered ponderosa pine.

From the corner of sections 11, 12, 13, and 14.

**S.  $89^{\circ}44.0'$  W.,** between sections 11 and 14.

- 20.384** Point for the E 1/16 section corner of sections 11 and 14, not monumented.
- 40.768** The 1/4 section corner of sections 11 and 14, monumented with a trachyte stone, 12x10x4 inches, firmly set, marked 1/4 on north face, with an embedded mound of stone 3 ft. base located to the north.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T36SR6W  
S11  
1/4 —  
S14  
2014

Deposit the marked stone alongside and buried a Motorola cell

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

phone at the base of the aluminum post.

Rehabilitate the mound of stone, 3 by 2 ft. base by 1 ft. high,  
north of the aluminum post.

Corner falls on flat ground on a finger ridge extending north and  
south, in dense bitterbrush, sagebrush, piñon and juniper.

---

S. 89°59.4' W., beginning new measurement.

40.066 The corner of sections 10, 11, 14, and 15.

---

From the corner of sections 14, 15, 22, and 23.

S. 89°08.0' W., between sections 15 and 22.

39.216 The 1/4 section corner of sections 15 and 22, monumented with a  
trachyte stone(Record, Quartzite), 12x8x6 inches, firmly set,  
marked 1/4 on north face.

from which the remaining original bearing tree

A ponderosa pine, 10 inches diameter, bears S. 69° E., 78  
links distance, with a healed blaze.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24  
inches in the ground, with aluminum cap marked

T36SR6W  
S15  
1/4 —  
S22  
2014

Deposit the marked stone and set a steel fence post alongside,  
and buried a magnet at the base of the aluminum post, raise a  
mound of stone 3 ft. base by 1 ft. high to the north.

Corner falls 24 lks. south of a fence line extending east and  
west, in a shallow drainage extending north and south, in tall  
ponderosa pine.

From this point, a rebar, 5/8 inch diameter, firmly set, with  
yellow cap attached bears N. 29°10.3' E., 0.262 chains distance,  
with cap marked KEN HAMBLIN PLS 166295, in a fence line extending  
east and west, and was not utilized in the course of this survey.

---

From the 1/4 section corner of sections 15 and 16, at the corner  
of old fences extending north, south, and east. This point is  
harmoniously related to other corners found in this township, and  
is accepted as the best available evidence of the original corner  
position.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 2 ft. base, to top of aluminum cap marked

T36SR6W  
1/4  
S16 | S15  
2014

Leave the remains of the corner post alongside and buried a magnet at the base of the aluminum post.

Corner falls at corner of old fences with no wire remaining, extending north, south, and east, on flat ground, on north edge of finger wash drains northwest into a bigger wash 24 lks. distance drains north by northeast.

N. 0°06.0' W., between sections 15 and 16.

20.092 Point for the N 1/16 section corner of sections 15 and 16, not monumented.

40.184 The corner of sections 9, 10, 15, and 16, monumented with a trachyte stone, (Record, sandstone), 12x8x6 inches, firmly set, marked 4 notches on south and 3 notches on east edges, and with a mound of stone, 3 ft. base by 1 ft. high located to the north.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T36SR6W  
S9 | S10  
S16 | S15  
2014

Deposit the marked stone alongside and buried a magnet at the base of the aluminum post.

Corner falls at corner of fences extending north, east, and west, on a slight west slope in low sagebrush.

From the true point for the corner of sections 10, 11, 14, and 15.

N. 89°31.4' W., between sections 10 and 15.

39.877 The 1/4 section corner of sections 10 and 15, monumented with a sandstone, 8x8x4 inches, (Record, 13x9x6 inches), firmly set, marked 1/4 on north face.

from which the remaining original bearing tree



DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

A piñon, 20 inches diameter, bears S. 19° W., 37 links distance, (Record, 46 links distance), scribed 1/4 S BT, on a partially healed blaze.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T36R6W  
S10  
1/4 —  
S15  
2014

Deposit the marked stone alongside, buried a magnet at the base, and raise a mound of stone, 3 ft. base by 1 ft. high, north of the aluminum post.

Corner falls on a steep south slope in dense old growth piñon and juniper.

---

S. 89°47.3' W., beginning new measurement.

20.028 Point for the W 1/16 section corner of sections 10 and 15.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T36SR6W  
S10  
W 1/16 —  
S15  
2014

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner falls 25 lks. east from the corner of fences extending south and west, on gentle rolling land in low sagebrush and tall silver sage.

40.056 The corner of sections 9, 10, 15, and 16.

---

The Subdivision of Section 12,  
Township 36 South, Range 6 West, Salt Lake Meridian, Utah

---

From the true point for the 1/4 section corner of sections 12 and 13.

N. 0°30.0' W., on the N-S centerline of section 12.

THE SUBDIVISION OF SECTION 12,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

**20.087** Point for the center S 1/16 section corner of section 12.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a small mound of stone, with aluminum cap marked

T36SR6W  
C  
S 1/16 | S12  
C  
2014

Deposit a magnet at the base of the aluminum post.

Corner falls 46 lks. north of a fence line extending east and west, on top of ridge extending east and west, in piñon and red cedar.

**40.174** Point for the center 1/4 section corner, at intersection with the E-W centerline of section 12.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 3 ft. base, to top of aluminum cap marked

T36SR6W  
C 1/4  
S12  
2014

Deposit a magnet at the base of the aluminum post.

Corner falls on a steep south slope in piñon and juniper growth.

**80.378** The 1/4 section corner of sections 1 and 12.

From the 1/4 section corner of section 12 only, on the west boundary of Township 36 South, Range 5 West, monumented with an aluminum post 2 1/2 inches diameter, firmly set, projecting 10 inches above a mound of stone, 2 ft. base, to top of aluminum cap marked as described in the official field notes of Township 36 South, Range 5 West, concurrently resurveyed under this same group number.

**S. 89°56.7' W.**, on the E-W centerline of section 12.

**20.604** Point for the center E 1/16 section corner of section 12, not monumented.

**41.208** The center 1/4 section corner of section 12.

**61.470** Point for the center W 1/16 section corner of section 12, not monumented.

**81.732** The 1/4 section corner of sections 11 and 12.

THE SUBDIVISION OF SECTION 12,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

From the E 1/16 section corner of sections 12 and 13.

N. 0°16.0' E., on the N-S centerline of the SE 1/4 of section 12.

- 20.112 Point for the SE 1/16 section corner, at intersection with the E-W centerline of the SE 1/4 of section 12, falls in a wash.

Point selected for an offline witness corner, bears S.62°19.7'W., 1.084 chains distance.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

WC  
T36SR6W  
SE 1/16 ↗ S12  
2014

Deposit a magnet at the base of the aluminum post.

Raise a mound of stone 2 ft. base by 1 ft. high, to the west of the aluminum post.

Corner falls on flat ground in sagebrush.

- 40.212 The point for the center E 1/16 section corner of section 12.

From the point for the S 1/16 section corner of section 12 only, on the west boundary of Township 36 South, Range 5 West, not monumented.

S. 89°58.8' W., on the E-W centerline of the SE 1/4 of section 12.

- 20.463 The SE 1/16 section corner of section 12.

- 40.800 The center S 1/16 section corner of section 12.

From the W 1/16 section corner of sections 12 and 13.

N. 0°37.4' W., on the N-S centerline of the SW 1/4 of section 12.

- 20.072 Point for the SW 1/16 section corner, at intersection with the E-W centerline of the SW 1/4 of section 12.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a small mound of stone, with aluminum cap marked

THE SUBDIVISION OF SECTION 12,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

T36SR6W  
SW 1/16  
S12  
2014

Deposit a magnet at the base of the aluminum post.

Corner falls on gentle rolling land in red cedar and scattered ponderosa pine.

From this point, a rebar, 5/8 inch diameter, firmly set, projecting 4 inches above the ground, with yellow cap attached, bears S. 42°48.3' E., 1.233 chains distance, with cap marked KEN HAMBLIN PLS 166295. Corner falls at corner of fences extending south and east, and was not utilized in the course of this survey.

40.144 The point for the center W 1/16 section corner of section 12.

---

From the center S 1/16 section corner of section 12.

S. 89°58.7' W., on the E-W centerline of the SW 1/4 of section 12.

20.220 The SW 1/16 section corner of section 12.

40.440 The point for the S 1/16 section corner of sections 11 and 12.

---

The Subdivision of Section 13  
Township 36 South, Range 6 West, Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 13 and 24.

N. 0°04.7' E., on the N-S centerline of section 13.

39.682 Point for the center 1/4 section corner, at intersection of the E-W centerline of section 13.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, to solid rock, in a small mound of stone, to top of aluminum cap marked

T36SR6W  
C 1/4  
S13  
2014

Deposit a magnet at the base of the aluminum post.

Corner falls on gentle rolling land in sagebrush and scattered piñon and juniper.

59.668 Point for the center N 1/16 section corner of section 13.

THE SUBDIVISION OF SECTION 13,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a small mound of stone, to top of aluminum cap marked

T36SR6W  
C  
N 1/16 | S13  
C  
2014

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner falls at base of northeast slope, 15 lks. north of a fence line extending east and west, in sagebrush, bitterbrush, scattered piñon, juniper, and ponderosa pine.

**79.654** The true point for the 1/4 section corner of sections 12 and 13.

---

From the 1/4 section corner of section 13 only, monumented with an aluminum post 2 1/2 inches diameter, firmly set, in a mound of stone, 2 ft. base, to top of aluminum cap marked as described in the official field notes of Township 36 South, Range 5 West, concurrently resurveyed under this same group number.

**S. 89°41.8' W.**, on the E-W centerline of section 13.

**20.153** Point for the center E 1/16 section corner of section 13, not monumented.

**40.306** The center 1/4 section corner of section 13.

**60.590** Point for the center W 1/16 section corner of section 13.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 2 ft. base, to top of aluminum cap marked

T36SR6W  
W 1/16  
C — C  
S13  
2014

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner falls 0.8 lks. north of a fence line extending east and west, on top of ridge extending north and south.

From this point, a rebar, 5/8 inch diameter, firmly set, projecting 4 inches above the ground, bears N. 88°53.7' E., 0.393 chains distance with yellow cap attached marked KEN HAMBLIN PLS 166295. Corner falls at corner of fences extending north and west, on top of ridge extending north and south, and was not

THE SUBDIVISION OF SECTION 13,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

utilized in the course of this survey.

**80.874** The 1/4 section corner of sections 14 and 13.

---

From the point for the center E 1/16 section corner of section 13.

**N. 0°06.9' E.**, on the N-S centerline of the NE 1/4 of section 13.

**19.929** Point for the NE 1/16 section corner, at intersection with the E-W centerline of the NE 1/4 of section 13.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T36SR6W

NE 1/16

S13

2014

Deposit a magnet at the base of the aluminum post.

Corner falls on a steep east slope, in thick sagebrush, and scattered piñon and juniper.

From this point, a rebar, 5/8 inch diameter, firmly set, projecting 3 inches above the ground, with yellow cap attached bears S. 77°46.7' E., 0.325 chains distance, cap marked KEN HAMBLIN PLS 166295, Corner falls at corner of fences extending north and west, and was not utilized in the course of this survey.

**39.858** The E 1/16 section corner of sections 12 and 13.

---

From the point for the N 1/16 section corner of section 13 only, on the west boundary of Township 36 South, Range 5 West, not monumented.

**S. 89°51.5' W.**, on the E-W centerline of the NE 1/4 of section 13.

**20.155** The NE 1/16 section corner of section 13.

**40.310** The center N 1/16 section corner of section 13.

---

From the center W 1/16 section corner of section 13.

**N. 0°13.5' E.**, on the N-S centerline of the NW 1/4 of section 13.

**20.044** Point for the NW 1/16 section corner, at intersection with the E-W centerline of the NW 1/4 of section 13.

THE SUBDIVISION OF SECTION 13,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 15 inches in the ground, to solid rock, in a mound of stone, 2 ft. base, to top of aluminum cap marked

T36SR6W  
NW 1/16  
S13  
2014

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner falls on a steep rocky north west slope in thick bitterbrush and sagebrush, with scattered piñon, red cedar, and ponderosa pine.

From this point, a rebar, 5/8 inch diameter, firmly set, projecting 2 inches above the ground, with yellow cap attached bears S. 69°10.3' E., 0.582 chains distance, cap marked KEN HAMBLIN PLS 166295, corner falls at corner of fences extending north, south, east, and west, and was not utilized in the course of this survey.

**40.088** The W 1/16 section corner of sections 12 and 13.

---

From the center N 1/16 section corner of section 13.

**S. 89°51.6' W.**, on the E-W centerline of the NW 1/4 of section 13.

**20.230** The NW 1/16 section corner of section 13.

**40.460** The N 1/16 section corner of sections 13 and 14.

---

The Subdivision of Section 14  
Township 36 South, Range 6 West, Salt Lake Meridian, Utah

---

From the 1/4 section corner of sections 14 and 23.

**N. 0°43.6' W.**, on the N-S centerline of section 14.

**19.512** Point for the center S 1/16 section corner of section 14.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 3 ft. base, to top of aluminum cap marked

T36SR6W  
C  
S 1/16 | S14  
C  
2014

THE SUBDIVISION OF SECTION 14,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner falls 41 lks. south of a fenceline extending east and west, on gentle rolling land in sagebrush, bitterbrush, with scattered red cedar and ponderosa pine.

From this point, a rebar, 5/8 inch diameter, firmly set, projecting 5 inches above the ground, with yellow cap attached bears N. 44°23.3' E., 0.524 chains distance, cap marked KEN HAMBLIN PLS 166295, and was not utilized in the course of this survey.

- 39.024** Point for the center 1/4 section corner, at intersection with the E-W centerline of section 14.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a small mound of stone, to top of aluminum cap marked

T36SR6W  
C 1/4  
S14  
2014

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner falls 27 lks. south of a large wash drains in a meandering northeast by southeast, on gentle rolling land in a mix of sagebrush and silver sage.

- 59.086** Point for the center N 1/16 section corner of section 14.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 2 ft. base, to top of aluminum cap marked

T36SR6W  
C  
N 1/16 | S14  
C  
2014

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner falls 21 lks. north of an old fence line extending east and west, and 108 lks. west of a fence line extending north and south, on a slight southeast slope.

From this point, a rebar, 5/8 inch diameter, firmly set, projecting 3 inches above the ground, with yellow cap attached bears N. 55°18.6' E., 1.322 chains distance, cap marked KEN HAMBLIN PLS 166295, corner falls at corner of fences extending south, east, and west, and was not utilized in the course of this survey.



THE SUBDIVISION OF SECTION 14,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

79.148 The 1/4 section corner of sections 11 and 14.

---

From the 1/4 section corner of sections 13 and 14.

S. 89°50.8' W., on the E-W centerline of section 14.

20.002 Point for the center E 1/16 section corner of section 14.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone, 2 ft. base, to top of aluminum cap marked

T36SR6W  
E 1/16  
C — C  
S14  
2014

Set a rebar, 4 ft. long, 3/8 inch diameter with a PVC pipe, 3/4 inch diameter alongside and buried a magnet at the base of the aluminum post.

Corner falls on the north edge of a small wash drains northwesterly and 23 lks. south of a fence line extending east and west, on gentle rolling land.

40.004 The center 1/4 section corner of section 14.

60.588 Point for the center W 1/16 section corner of section 14, not monumented.

81.172 The 1/4 section corner of sections 14 and 15.

---

From the center E 1/16 section corner of section 14.

N. 0°10.5' W., on the N-S centerline of the NE 1/4 of section 14

Point for the NE 1/16 section corner, at intersection with the E-W centerline of the NE 1/4 of section 14.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a small mound of stone, to top of aluminum cap marked

T36SR6W  
NE 1/16  
S14  
2014

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner falls N. 66° E., 94 lks. from corner of old fences

THE SUBDIVISION OF SECTION 14,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

extending south and west and 23 lks. South of a fence line extending east and west, on gentle rolling land in low sagebrush, silver sage, with scattered piñon and red cedar.

From this point, a rebar, 5/8 inch diameter, firmly set, projecting 2 inches above the ground, with yellow cap attached bears N. 75°27.9' E., 0.899 chains distance, cap marked KEN HAMBLIN PLS 166295, and was not utilized in the course of this survey.

- 40.162 The point for the E 1/16 section corner of sections 11 and 14.
- 

From the N 1/16 section corner of sections 13 and 14.

S. 89°47.4' W., on the E-W centerline of the NE 1/4 of section 14.

- 20.193 The NE 1/16 section corner of section 14.

- 40.386 The center N 1/16 section corner of section 14.
- 

From the point for the E 1/16 section corner of sections 14 and 23.

N. 0°19.8' W., on the N-S centerline of the SE 1/4 of section 14.

- 19.623 Point for the SE 1/16 section corner, at intersection with the E-W centerline the SE 1/4 of section 14.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a mound of stone 2 ft. base, to top of aluminum cap marked

T36SR6W  
SE 1/16  
S14  
2014

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner falls 23 lks. south of a fence line extending east and west, on gentle rolling land, in sagebrush, bitterbrush, with scattered piñon and ponderosa pine.

From this point, a rebar 5/8 inch diameter, projecting 2 inches above ground, with yellow plastic cap attached, bears N. 57° E., 0.37 chains distance, cap marked Ken Hamblin PLS 166295, and was not utilized in the course of this survey.

- 39.246 The center E 1/16 section corner of section 14.
-

THE SUBDIVISION OF SECTION 14,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

From the point for the S 1/16 section corner of sections 13 and 14.

N. 89°49.7' W., on the E-W centerline of the SE 1/4 of section 14.

19.868 The SE 1/16 section corner of section 14.

39.736 The center S 1/16 section corner of section 14.

From the W 1/16 section corner of section 14 and 23.

N. 0°16.1' W., on the N-S centerline of the SW 1/4 of section 14.

19.553 Point for the SW 1/16 section corner, at intersection with the E-W centerline of the SW 1/4 of section 14.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T36SR6W  
SW 1/16  
S14  
2014

Deposit a magnet at the base of the aluminum post.

Corner falls on gentle rolling land in sagebrush, with scattered red cedar.

39.106 The point for the center W 1/16 section corner of section 14.

From the center S 1/16 section corner of section 14.

S. 89°43.7' W., on the E-W centerline of the SW 1/4 of section 14.

20.742 The SW 1/16 section corner of section 14.

41.484 The point for the S 1/16 section corner of sections 14 and 15.

From the center N 1/16 section corner of section 14.

S. 89°54.9' W., on the E-W centerline of the NW 1/4 of section 14.

40.617 The N 1/16 section corner of sections 14 and 15.

The Subdivision of Section 15  
Township 36 South, Range 6 West, Salt Lake Meridian, Utah

THE SUBDIVISION OF SECTION 15,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

From the 1/4 section corner of sections 15 and 22.

**N. 0°20.7' E.**, on the N-S centerline of section 15.

- 39.891** Point for the center 1/4 section corner, at intersection with the E-W centerline of section 15.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T36SR6W  
C 1/4  
S15  
2014

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner falls 24.5 lks. south of a fence line extending east and west, on gentle rolling land in low sagebrush.

- 60.113** Point for the center N 1/16 section corner of section 15.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T36SR6W  
C  
N 1/16 | S15  
C  
2014

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner falls 12 lks. south of a fenceline extending east and west, on gentle rolling land, in scattered sagebrush and silver sage.

- 80.335** The 1/4 section corner of sections 10 and 15.

From the 1/4 section corner of sections 14 and 15.

**N. 89°50.2' W.**, on the E-W centerline of section 15.

- 39.315** The center 1/4 section corner of section 15.

- 59.299** Point for the center W 1/16 section corner of section 15, not monumented.

- 79.283** The 1/4 section corner of sections 15 and 16.

From the N 1/16 section corner of section 14 and 15.

THE SUBDIVISION OF SECTION 15,  
TOWNSHIP 36 SOUTH, RANGE 6 WEST, SALT LAKE MERIDIAN, UTAH

## CHAINS

N. 89°40.8' W., on the E-W centerline of the NE 1/4 of section 15.

39.595 The center N 1/16 section corner of section 15.

---

From the point for the center W 1/16 sections corner of section 15.

N. 0°10.9' W., on the N-S centerline of the NW 1/4 of section 15.

20.156 Point for the NW 1/16 section corner, at intersection with the E-W centerline of the NW 1/4 of section 15.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T36SR6W  
NW 1/16  
S15  
2014

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner falls 12 lks. south a fence line extending east and west, on gentle rolling land, in scattered sagebrush and silver sage.

40.312 The W 1/16 section corner of sections 10 and 15.

---

From the center N 1/16 section corner of section 15.

S. 89°58.5' W., on the E-W centerline of the NW 1/4 of section 15.

20.006 The NW 1/16 section corner of section 15.

40.012 The point for the N 1/16 section corner of sections 15 and 16.

---

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**FIELD ASSISTANTS**


Name	Capacity
Ronald K. Baugh	Supervisory Cadastral Surveyor
R. Keith Batty	Cadastral Surveyor
Frazier Hansel	Survey Aide
Tyler Gower	Survey Aide
Dameon Julander	Survey Aide

## CERTIFICATE OF SURVEY

I, *Jeremy D. Davis, Cadastral Surveyor*, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions bearing the date of the *June 17, 2014*, I have *dependently resurveyed a portion of the subdivisional lines, and the subdivision of sections 12, 13, 14, and 15, in Township 36 South, Range 6 West*, of the *Salt Lake Meridian*, in the State of *Utah*, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 25, 2016

Date

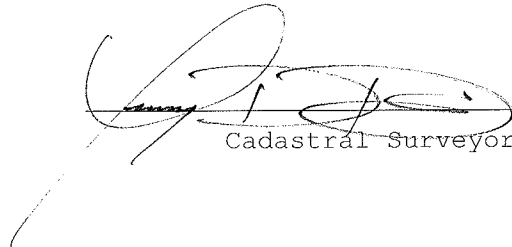  
Cadastral Surveyor


## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Salt Lake City, Utah

The foregoing field notes of the *dependent resurvey of a portion of the subdivisional lines, and the subdivision of sections 12, 13, 14, and 15, in Township 36 South, Range 6 West, Salt Lake Meridian, Utah*, executed by *Jeremy D. Davis, Cadastral Surveyor*, having been critically examined and found correct, are hereby approved.

June 30, 2016

Date



Chief Cadastral Surveyor for Utah